




Finishes available

Matt Black Matt Grey Gloss White Gloss Brown Gloss Black

COMPATIBLE

Poujoulat offers a complete range of adaptors which ensure a perfect seal within the Vitreous enamelled flue pipe.




or



Appliance Adaptor

Choice of diameters

Accessories

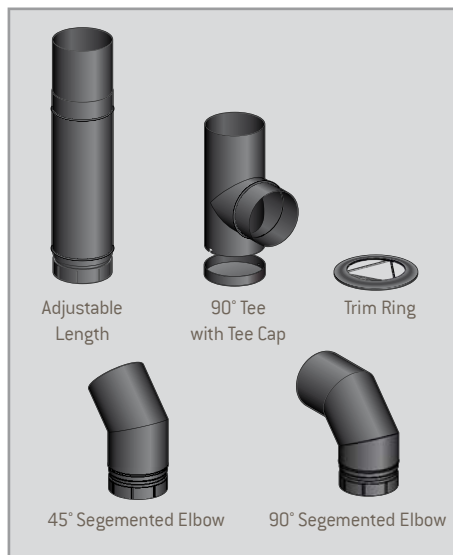

Adjustable Length

90° Tee with Tee Cap

Trim Ring

45° Segemented Elbow

90° Segemented Elbow

Key Benefits

Using Enamel Premium


- Exceptional value
- High quality
- Quick and easy to install
- 10 year AXA guarantee

PRACTICAL

The unique push-fit spigot of the Poujoulat Enamelled range requires no fire-cement and fixings which ensure a pleasing, quality and aesthetic appearance.


ENAMEL Premium

Vitreous enamelled connecting flue pipe

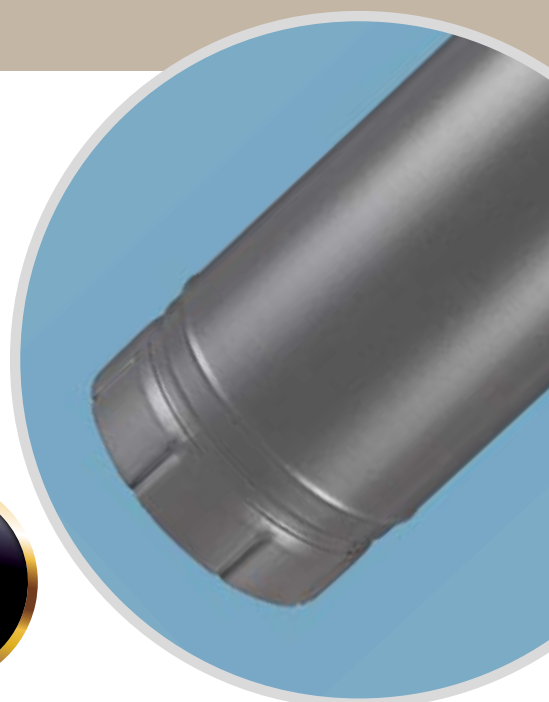


The **ENAMEL Premium** is an innovative evolution of the vitreous connecting flue pipe, using modern engineering design principle, combined with «state of the art» manufacturing process. This provides the optimum solution for connecting flue pipes.

DIAMETERS

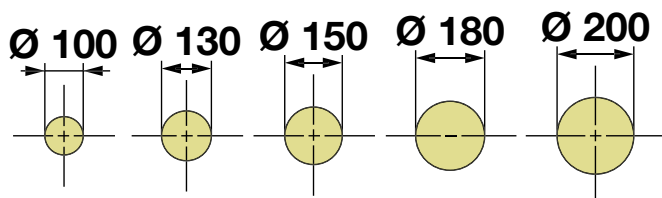

FINISHES AVAILABLE

In stock

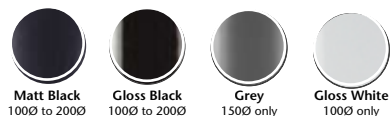

Matt Black 100Ø to 200Ø

Gloss Black 100Ø to 200Ø

Grey 150Ø only

Gloss White 100Ø only

On demand (1 or 2 weeks delay)



Gloss Brown 100Ø to 150Ø

Grey 100Ø to 130Ø

Gloss White 130Ø to 150Ø

PRINCIPLE FEATURES

- > **Wall material:** 2-3 coats, enamelled steel 0.7mm thick.
- > The "THERM" ® coatings cover both inner and outer surfaces.
- > All sections are "LASER" welded, seamless joint.
- > **Max. Temperature limitation:** 600°C
- > Access doors & Tee caps are supplied with an enamel finish.
- > Each component is constructed with a push fit "GASTOP" ® spigot joint N1 tested.
- > Only use High Temp Mastic with the appliance adaptors.

BENEFITS

- > **A pleasing, quality, aesthetic appearance.**
- > **The unique push-fit joint requires no fire-cement or fixings.**
- > **Very high resistance to scratching.**
- > **Very high resistance to high temperature, acid & tar.**
- > **Quick and easy to install.**
- > **exceptional value**
- > **10 years guarantee**

Product certified : **BS EN 1856-2:2004**

CE 0407 CPD 077

T600 N1 D Vm L80050G

